

注意 | 产品开机前, 请务必详读使用手册。
实际产品的颜色可能会与产品名录上的颜色略微差异。
本产品名录的内容可能会事先没有通知而更改。

M2 Corporation
Man · Machine · Interface

MDP SERIES



MDP SERIES

Product Catalog

M2I Corporation

总公司 ADDRESS: 11-35, Simin-daero 327beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do 14055, Republic of Korea
TEL: 82-31-465-3366
FAX: 82-31-465-3355

V 1.0C 230426

www.m2i.co.kr/chn

MDP

采用电容式触摸和FHD LCD的两个通道KVM触摸显示器

接口

- 两个HDMI端口
- 两个USB上行接口
- 两个USB下行接口



MDP-DC1900WD的特点



两个通道触摸显示器

提供两个通道的工业用触摸显示器
KVM按钮便利变更通道



防爆结构

采用防爆结构的触摸显示器



电容式触摸

采用电容式触摸方式提供更鲜明的画质



FHD LCD

16:9比例, 19寸, 采用FHD LCD(1920 x 1080)



前面USB端口

提供可连接鼠标、键盘、U盘、扫描枪的端口



铝材质框架

更加强的耐久性和高档设计的铝材质机身



防冲击保护


IK8等级防冲击保护

MDP-DC1900WD 规格

Functional	MDP-DC1900WD	
Display type	18.5" TFT Color	
Backlight Life	50000 hour	
Aspect Ratio	16 : 9	
Color	16M	
Display	Viewing Angle(H/V)	89/89/89/89
	Contrast Ratio	1000 : 1
	Response Time	20ms
	Brightness	350Cd/m2
	Recommend Resolution	1920 x 1080
Touch	Touch Type	Capacitive Touch
	HDMI Input	2 Ports
Interface	USB Up Stream	2 Ports
	USB Down Stream	2 Ports
OSD Controls	Capacitive Touch Button	KVM/Up/Down/Menu, Select/Power
Power	Input Voltage	24Vdc(20~28Vcd)
	Power Consumption	40W or less
	Voltage Sag	24Vdc, Within 10ms
	Insulation Resistance	500Vdc, 10MΩ
	Operation Temperature(°C)	-10 ~ +50
Environment	Storage Temperature(°C)	-20 ~ +60
	Operation Humidity(%RH)	0 ~ 90(No dew)
	Noise Immunity	1000Vp-p(Pulse width 1μs)
	Static Electricity Discharge	Connective discharge from EN61000-4-2: ±4kV
	Shock Endurance	10G X, Y, Z each direction(for 3 times)
	Ground Connection	Class 3(100Ω or less)
	Protection Classification	IP65(Front)
	Certification	CE, KC, UL
	Panel Cut(mm)	463 x 314
	External Dimension(mm)	477.4 x 328.4 x 63.5
Structure	Weight(kg)	5.0
	Cooling System	Natural air circulation
	Case Material	Aluminum + Plastic
	VESA Wall Mount Holes(mm)	100 x 100

图纸

MDP-DC1900WD

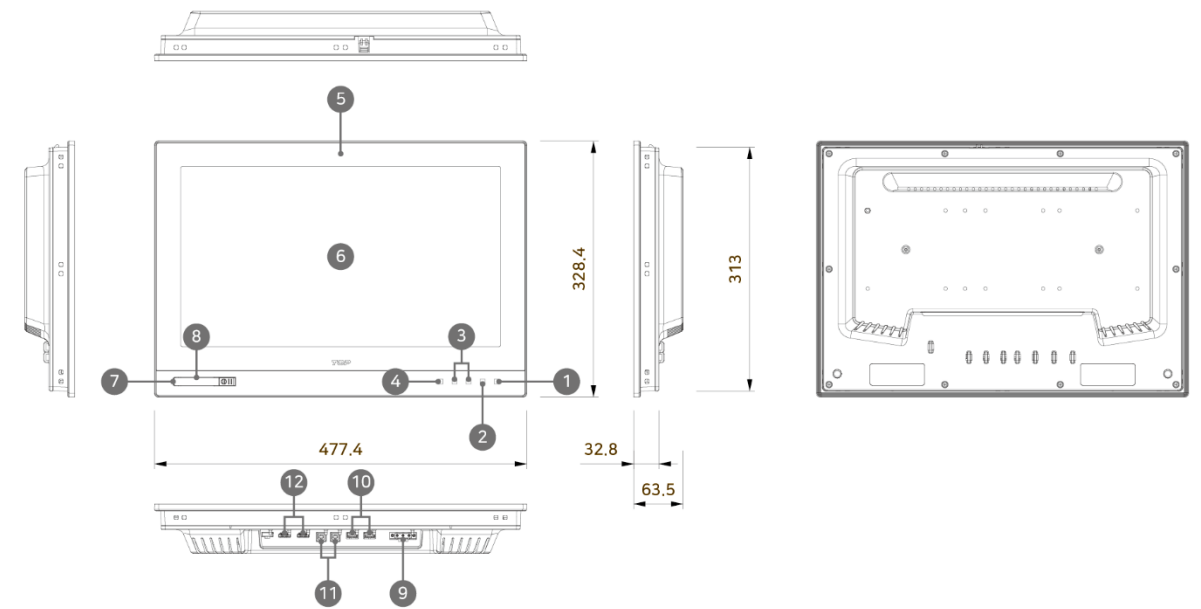

- | | | |
|------------|------------|--------------|
| ① 电源LED&按钮 | ⑤ LCD面板 | ⑩ USB A 1, 2 |
| ② OSD菜单按钮 | ⑥ 触摸面板 | ⑪ USB B 1, 2 |
| ③ 上/下按钮 | ⑧ USB Host | ⑫ HDMI 1, 2 |
| ④ 画面切换按钮 | ⑨ 电源输入 | |